




HP PVC-free Wall Paper

This product is compatible only with HP large format printers using HP Latex Inks and HP UV-curable inks



The HP large format printing system—the complete solution

HP Latex, HP DesignJet, and HP Scitex printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

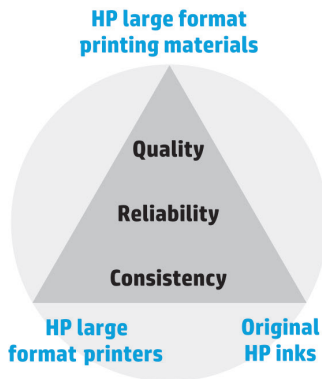

Differentiate with PVC-free¹ wall murals

Differentiate with environmental certifications

Offer bold wall decorations and more—provide reassurance with environmental certifications and responsible sourcing. Odorless displays are UL GREENGUARD GOLD Certified² and meet AgBB criteria³ using this FSC[®]-certified paper.⁴

Be productive—easy to print, install, and remove

Maintain high productivity in your printshop and offer your customers an easy-to-use solution. This wall paper goes up—and comes down—with water, and it comes with an HP warranty.⁵

Boldly define interior spaces—see the ColorPRO difference

See high-impact graphics with an extended range of colors. Engineered with ColorPRO Technology to deliver color excellence, this digital wall mural solution from HP delivers professional quality and striking results.

Target customers	Applications	Benefits
Print service providers	Wall murals	PCV-free ¹ alternative, easier to dispose of than most PVC-based substrates
	Creative design applications	Mold and mildew resistant ⁶
		Vivid color, high-definition detail
		Ultra-smooth finish
		Over 60 years indoor display permanence, behind glass ⁷
		Prepaste facilitates easy application
		Strippable and easy to remove, with an HP warranty ⁵
		Flame resistant ⁸
		Carries the CE mark ⁹

Technical specifications



Eco Highlights

- FSC®-certified paper from well-managed forests
- Paper contains 10% recycled content from post-consumer waste
- When printed with HP Latex Inks, the prints produced:
 - Are odorless
 - Are UL GREENGUARD GOLD Certified¹
 - Meet AgBB criteria for health-related evaluation of VOC emissions of indoor building products²

¹ See greenguard.org.

² See umweltbundesamt.de/en/topics/health/commissions-working-groups/committees-for-health-related-evaluation-of-building.

Please recycle large-format printing hardware, ink cartridges, and printheads.

Find out how at our website: hp.com/recycle

HP PVC-free Wall Paper

For the latest ICC profiles/paper presets, please visit HPLFMedia.com/hp/paperpresets.

Weight	175 g/m ² per ISO 536 Test Method			
Thickness	177 microns/7 mil per ISO 534 Test Method			
Opacity	94% per TAPPI T-425 Test Method			
Brightness	83% per ISO 2470 Test Method			
Whiteness	85 per ISO 11475 Test Method			
Finish	Matte			
Operating temperature	15 to 30° C / 59 to 86° F			
Operating humidity	15 to 80% RH			
Display permanence (Indoor home or office)	Over 60 years, away from direct sun, behind glass, with HP Latex Inks ⁷			
Display permanence (Commercial in-window)	Over 3 years, unlaminated with HP Latex Inks ¹⁰			
Water resistance	Water resistant with HP Latex Inks ¹¹			
Flame resistance	Class A, B1, EN 13501, M1, and ISO 5660-1:2002 approved fire certifications			
Shelf life	1 year, unopened in original packaging			
Storage temperature	15 to 30° C / 59 to 86° F			
Storage humidity	15 to 80% RH			
Country of origin	Product of United States			
Ordering information	Product numbers	Roll sizes	UPC codes	Region
	CH098B	1067 mm x 30,5 m (42 in x 100 ft)	848412009699	Worldwide
	CH003B	1372 mm x 30,5 m (54 in x 100 ft)	848412009675	Worldwide
	CH103A	1372 mm x 91,4 m (54 in x 300 ft)	848412009682	Worldwide
Warranty	HP offers a range of self-adhesive materials with warranties that guarantee these products to be free of material or coating flaws and defects that affect the final use of the print and meet HP published specifications. These warranties also cover key performance characteristics such as display permanence and easy removal from specified surfaces. ⁵ Some warranty limitations apply, see the Limited Warranty statement at HPLFMedia.com/hp/MediaWarranties . To obtain warranty service, please contact Brand Management Group customer support at HPLFMedia.com/hp/en/contactus .			

¹ Chemical analysis demonstrated elemental chlorine to be below 200 ppm. Presence of chlorine is attributed to residual chlorine used in the papermaking process, and not due to the presence of PVC.

² HP PVC-free Wall Paper printed with HP Latex Inks is UL GREENGUARD GOLD Certified. UL GREENGUARD GOLD Certification to UL 2818 demonstrates that products are certified to UL's GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit ul.com/gg or greenguard.org.

³ HP PVC-free Wall Paper printed with HP Latex Inks meets AgBB criteria for health-related evaluation of VOC emissions of indoor building products. See umweltbundesamt.de/en/topics/health/commissions-working-groups/committee-for-health-related-evaluation-of-building.

⁴ BMG trademark license code FSC®-C1 15319, see fsc.org. HP trademark license code FSC®-C017543, see fsc.org. Not all FSC®-certified products are available in all regions.

⁵ HP PVC-free Wall Paper can be easily removed from the wall. Residual adhesive can be easily wiped clean with water and a sponge. Some warranty limitations apply, see the HP PVC-free Wall Paper warranty statement at HPLFMedia.com/hp/MediaWarranties.

⁶ With HP Latex Inks, UL GREENGUARD found HP PVC-free Wall Paper, which is designed with a breathable construction, to be mold and mildew resistant using test method GGTM.P040 and following the guidelines of ASTM D 6329. See greenguard.org/en/CertificationPrograms/listingprograms_copy1/CertificationPrograms_microbialProgram.aspx. No products are mold proof. It is uncertain that any material will resist mold or mildew indefinitely.

⁷ With HP Latex Inks. Display permanence rating for interior displays/away from direct sunlight, by HP Image Permanence Lab. See HPLFMedia.com/hp/printpermanence.

⁸ Class A, B1, EN 13501, M1, and ISO 5660-1:2002 approved fire certifications.

⁹ According to European Standard EN15102.

¹⁰ Interior in-window display ratings by HP Image Permanence Lab on a range of media including HP printing materials. See HPLFMedia.com/hp/printpermanence.

¹¹ Water resistance testing by HP Image Permanence Lab on a range of media including HP media; water resistance is comparable to eco- and low-solvent inks when printed on water-resistant substrates. Water resistance testing follows ISO 18935 method. Results may vary based on specific media performance. See HPLFMedia.com/hp/printpermanence.



Note: Not all FSC®-certified products are available in all regions.



For detailed information on the HP large format printing materials portfolio and to order, visit HPLFMedia.com

© 2020 HP Development Company, L.P. © 2020 Brand Management Group. The information contained herein is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP and BMG shall not be liable for technical or editorial errors or omissions contained herein.

HP is a registered trademark of HP Development Company, L.P. and is used by Brand Management Group on license from HP Development Company, L.P.

