

Print
Software
now
included!



Epson SureColor SC-S60600

- Produce durable outdoor signs and banners, window and back-lit displays, wallpaper and decor, vehicle wraps and POS, labels and more... AT HIGH SPEED
- Compatible with coated and uncoated paper, vinyl, canvas, film, mesh, and synthetic stocks
- Superior imaging with low grain, enhanced gamut, contrast and gloss levels
- Supports tiling applications with exceptional colour precision, consistency and print linearity
- Low running cost with rapid job set-up, minimum maintenance, low power & ink consumption
- Easy to operate with a see-through platen cover, remote management & status notification
- Extremely fast job completion with easy media set-up, integrated auto take-up and air dryer
- Enhanced reliability with a self cleaning printhead, headguard, and air filtration system
- Suits installation in factory, shop and air-conditioned studio environments
- High durability with flexible cover extendable up to FIVE YEARS
- Ships complete with NEW Epson Edge Print Software
- Supported by Epson's new Cloud Solution PORT service³

Epson SureColor SC-S60600

Product Specifications

| PRINTING TECHNOLOGY | |
|---------------------------|---|
| Print Engine | Self-cleaning DUAL PrecisionCore™ TFP with VSDT Epson Precision Dot Technology Integrated headguard |
| Media Handling | Auto media setting, auto skew correction, advanced auto tension control (Ad-ATC) & auto take-up (ATU), Print drying system INCLUDED |
| Print Quality | 1440 x 1440 dpi max res, 4.2 pl min drop size |
| INK SYSTEM | |
| Type | Epson UltraChrome® GS3 Eco-Solvent |
| Colour Set | DUAL CMYK |
| Loading | 8 x 700 ml cartridge |
| PRINT SPEEDS ¹ | |
| Draft | 95.3 m ² /h |
| Billboard | 52.3 m ² /h |
| Banner | 29.4 m ² /h |
| Vinyl, Canvas & Paper | 17.6 m ² /h |
| Film (Front & Backlit) | 6.8 m ² /h |
| MEDIA HANDLING | |
| Sizing | 300-1626 mm (64") wide, 1 mm max thickness |
| Input | Single roll, 45 kg max weight, 250 mm max diameter |
| Output | Sheet (manual cut) or roll (200 mm max diameter) |
| Drying | Individually adjustable input, platen & output heaters |
| MANAGEMENT | |
| Features | See-through platen with LED lighting On-board 2.7" Colour LCD panel Remote e-mail status & error reporting Ships with Epson Edge Print & Dashboard software. Compatible with a wide range of 3rd party RIP and workflow applications. |

| INTEGRATION | |
|-----------------------|--|
| Space Requirements | 3.6 x 2.7 x 1.7 m (WxDxH) |
| Operational Temp | 15 to 35°C (20 to 32°C recommended) |
| Operational Humidity | 20 to 80% (40 to 60% recommended) |
| Power Requirement | 3 x 240 V, 50/60 Hz, 5 A |
| Power Consumption | 745 W operating/ 13 W sleep |
| Operational Noise | 60.5 dB |
| Connectivity | USB2.0, 100BASE-TX/1000BASE-T |
| OPTIONS | |
| 1YWSCS60600 | 1 Yr CoverPlus On-Site Service Extension |
| 2YWSCS60600 | 2 Yr CoverPlus On-Site Service Extension |
| CONSUMABLES | |
| C13T724100 | Maintenance cleaning kit |
| C135210044 | Maintenance parts kit |
| C13T699300 | Ink cleaner |
| C13T833192 | 700 ml black ink cartridge |
| C13T833292 | 700 ml cyan ink cartridge |
| C13T833392 | 700 ml magenta ink cartridge |
| C13T833492 | 700 ml yellow ink cartridge |
| C13T833092 | Cleaning cartridge |
| C13T835192~492 | 700 ml KCMY 3M™ MCST™ ink cartridges ² |
| CONFIGURATION OPTIONS | |
| SCS606001YR | Printer with 1 Yr On-site Warranty |
| SCS606003YR | Printer with 1 Yr Wty & 2 Yr On-site CoverPlus |
| SCS606005YR | Printer with 1 Yr Wty & 2 x 2 Yr On-site CoverPlus |

¹ Figures are maximum engine speeds only. They do not include provisions for image processing, transfer, drying or post production. Nominated speeds may not be suitable for all media types and/or applications. Alternate print modes may be employed by RIP s/w for different results.

² For details on the MCS program including coverage, certification, terms & conditions please contact your local 3M office.


³ Operation with Epson Cloud Solution PORT requires a network with Internet access and a small Windows based server app to be installed on the customer network (can be configured to run in the background)



The **included** print drying system integrates with the printer to enable production at high speed and with heavy ink loads



The Ad-ATC and ATU enable roll-to-roll production with superior linearity, parallelism, and tension for off-line processing and tiling applications

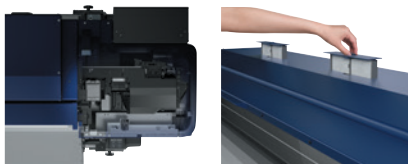

The auto head cleaning & air filtration systems work in conjunction with the headguard to ensure superior reliability with reduced maintenance



The printer can be managed through the control panel or via Epson Edge Dashboard complete with downloadable print & media profiles, remote e-mail status & error notifications. New Epson Edge Print software enables output of PS, EPS, Tiff, Jpeg, PNG & PDF files with image crop, layout & colour adjustment.

Better Products for a Better Future

Epson, SureColor, UltraChrome, PrecisionCore are registered trademarks of Seiko Epson Corporation. All other names and logos herein are for identification purpose only and are trademarks of their respective owners; Epson disclaims any and all rights. All print samples shown herein are simulations. Specifications are subject to change without notice; customers should review material posted on the web sites listed below for the latest information.

V5.0 May 2021

